


USE-AND-CARE MANUAL



- 1) Place several drops of cooking oil in convenience shelf bracket lubrication hole and rotate shelf. Frequency: **Monthly**
- 2) Location of the stamped diamond shaped product serial and date code. **DO NOT** remove for the life of the grill.
- 3) Place several drops of cooking oil along the stainless hinge pin of the draft control door. Frequency: **Monthly**
- 4) Remove the ash handle. Clean both the male and female threads, apply a generous coating of all-purpose grease to the threads. Re-install. Frequency: **Annually**
- 5) Remove the wheels. Apply a generous coating of all-purpose grease to each wheel pin. Pack all-purpose grease into the ball bearing housings. Re-install. Frequency: **Every 5 years**
- 6) Place several drops of cooking oil along the stainless hinge pin of the exhaust control door. Frequency: **Monthly**
- 7) Place several drops of cooking oil in cook chamber door stainless hinge pin body holes. Frequency: **Monthly**
- 8) Remove gages. Apply a generous coating of cooking oil to both the male and female threads. Re-install.. Frequency: **Annually**

rev 2019_July 28

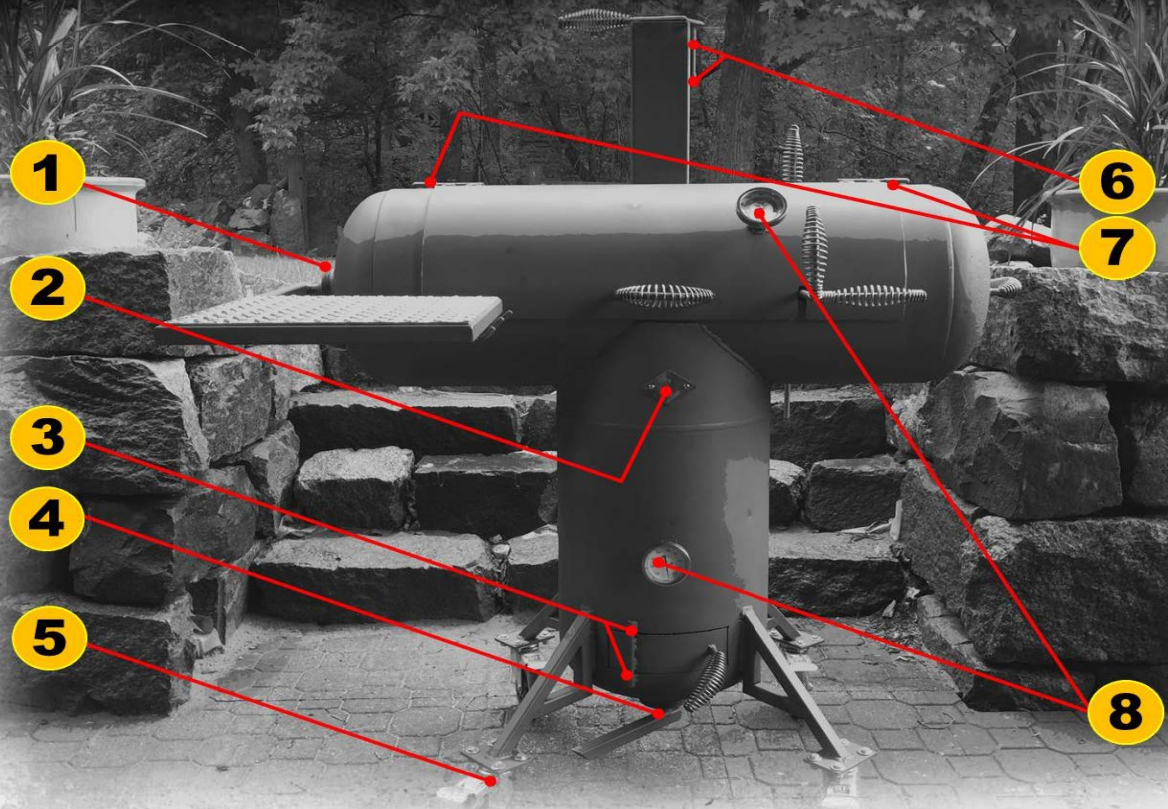